


MULTI-FUNCTIONAL DUST SUPPRESSION TRUCK




Main Parameters

Items	FLM5180TDYDF6D	
GVW	kg	18000
Wheelbase	mm	5000
Payload Weight	kg	7205
Upper Weight	kg	4700
Max Working Speed	km/h	89
Selectable Of Chassis Brand	DONGFENG	
Air Supply Type Sprayer Model	FW-DD100(J)	
Max Spraying Range	m	100
Max Spraying Height	m	30
Spraying Mist Flow	L/min	0~160
Pressure Of Spraying Mist	MPa	2
Sprayer Pitching Angle	-10°~60°	
Horizontal Rotating Angle	-90°~90°	
Sprinkler Pump Model	65QZB-50/110N	
Sprinkler Pump Flow	L/min	833
Rinsing Width	m	≥24
Sprinkling Width	m	≥16
Water Tank Effective Volume	m³	9.8
Noise	dB	≤88


Spray Nozzle

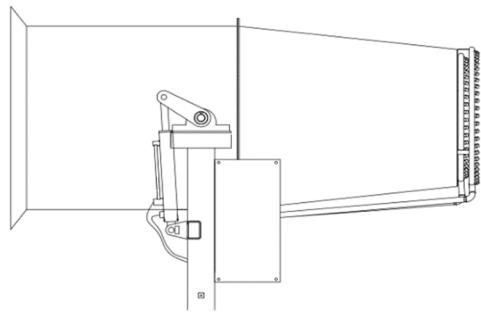

Air Supply Type Sprayer on rear work platform




Middle cleaning device under tank




Front cleaning device under Cab


Optional device

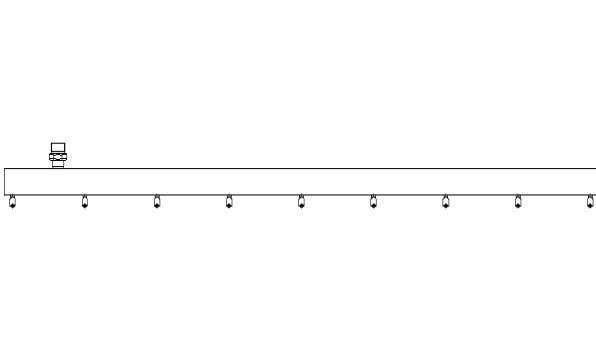

Low-pressure front cleaning device under Cab



Rear water sprinkling device under rear work platform

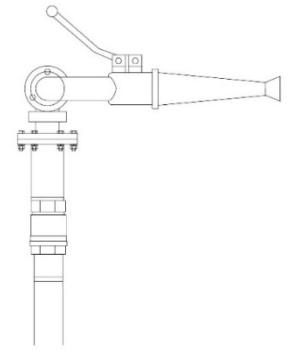

Rear mounted water sprayer on rear work platform

Device Data	
Low-pressure front cleaning device	2.5 m
Rear water sprinkling device	14 m
Rear mounted water sprayer	50 m

Base Specification

Water pump:

➤ The self-priming two-stage centrifugal pump is adopted, the pump is driven by the power of chassis engine, and the low level flushing mode is the first one in China.

Body:

➤ The structure layout is compact and reasonable, the tank volume is large, and the working time is long.
➤ The switch control valve parts and sprinkler system pipes are made of corrosion-resistant materials, the tank body is made of Q235B steel plate, and the internal part is treated with special process, without corrosion.

Safety:

- The water tank is equipped with a low water level sensor alarm system, which can automatically alarm when the water level is low.

Hydraulic system:

- The dual hydraulic cylinder is used in the pitching system to make the spray equipment operate more smoothly, especially in the process of running along the side of the dust suppression truck. The structure of the double oil cylinder effectively guarantees the safety of the equipment.

Control system:

- The whole vehicle adopts the advanced pneumatic system with high reliability and no pollution, which is convenient and flexible for operation.
- The electric control system of the self-made sprayer is controlled by the imported controller, which is controlled by the cockpit touch screen and the remote controller. It can control the direction, power output and working mode of the sprayer conveniently, and restrain the action limits of the sprayer to ensure the safety of the equipment.
- The intelligent control of the air duct can realize the functions of automatic return to the middle, automatic left and right circulation operation, etc.

Optional device:

- Front installing low-pressure cleaning device.
- The rear of the car can be equipped with a water spray.
- Stainless steel tank can be selected.
- Main control of rear watering.

Washing and cleaning device:

- It has the function of front sprinkling, which can not only be used for daily sprinkling, but also for humidification and dust reduction. It can also be used for road cleaning. The function of low-pressure front washing and rear sprinkling can be selected.
- Equipped with left and right middle column side punch, the nozzle can be adjusted.

Other advantages:

- 200 mesh high-precision water filter is adopted to effectively filter impurities in operation water and avoid nozzle blockage.
- The double wall muffler technology is adopted for the air duct to effectively reduce the operation noise of the air duct. The maximum noise of the whole vehicle is no more than 88 dB.

Mist sprayer:

- It adopts the environmental protection dust removal air delivery sprayer, compact structure, long range, small mist particles, large coverage area, can be operated manually or remotely. All operations can be carried out in the cab through the camera.
- The sprayer can rotate around the 90° by using the micro motor. The hydraulic system can control the pitch angle of -10° to 60°, and the speed of the transformation angle is fast and the working efficiency is high.
- The sprayer equipped with emergency stop button, safe and reliable operation.
- The spray system uses three-cylinder plunger high-pressure pump, the maximum pressure can reach 2 MPa, which strengthens the atomization effect of spray operation. Ensure the range of the sprayer.

Operation Instructions For Equipment To Disinfect

84 Disinfectant:

- The effective chlorine content will be shown on the label of 84 disinfectant mother liquor, for example, 1% represents 10,000 ppm. The amount of 84 disinfectant mother liquor to be added needs to be determined according to the final required concentration. Now take the FULONGMA brand 18-ton multi-function dust suppression truck as an example. The maximum capacity of tank is 10t, now we need mix the 84 disinfectant solution at 200 ppm. First add about 5 tons of water, and then evenly add the 84 disinfectant mother liquor with an effective chlorine content of 6% to the two front and rear mouths on the top of the tank, total weight is 33.33kg, and finally fill up with water. The added amount of 33.33kg of 84 disinfection mother liquor is calculated by the following formula:

$$G = V \times C / 1000000 / d$$

Remark: G = adding amount of 84disinfection solution (unit :kg, 1kg ≈ 1L)

V = Water tank volume (Unit: kg)

C = required solution concentration (ppm)

D = Available chlorine content of 84 disinfection mother solution (%)

Points for attention:

- 84 disinfectant is corrosive and irritating to the skin and oral mucosa. If it comes into direct contact with the original solution, there will be slight pain. The operator must do self-protection and wear appropriate equipment. Wearing gloves, masks, protective glasses, and work clothes (protective clothing should be worn if possible).
- 84 disinfectant is a chlorine-containing disinfectant, and chlorine is a volatile gas, so the container containing the disinfectant must be covered, otherwise the disinfection effect will not be achieved.
- Do not mix 84 disinfectant with other detergents or disinfectants, because this will increase the concentration of chlorine in the air and cause chlorine poisoning, which endangers life safety.
- Maintain proper ventilation in the driver's cab during driving. During spraying disinfection, spraying on people and animals is strictly prohibited.
- During the disinfection operation of the truck, pls use the sprayer at the maximum angle and the maximum wind force toward the air to achieve the widest disinfection range.
- In order to achieve the best disinfection and spraying effect, the working speed of the truck should be maintained at 5-10km / h.
- Because 84 disinfectant is corrosive to metal, it is not recommended to use this truck as disinfection and epidemic prevention equipment for a long time. During short-term use, it is normal to see a slight leak at the seal part of water pipe. If the water leakage is serious, replace the seal ring in time. As far as possible after each operation, water tanks and pipelines should be washed with clean water to prevent chemicals from corroding, including pipelines ,pump seals, tanks and pipeline parts.